

Model PSH(Flush Diaphragm)

High Performance Pressure Transducer

Description

PSH(Flush Diaphragm) model is designed as a flush diaphragm suitable for sanitary use and is high precise for tank levels. Media-wetted materials there are composed by stainless steel 316L to have superior corrosion-resistant properties. It is applied to precise measurement and builds an inner amplifier to interface with various kinds of controllers.

Features

- ▶ CE Certified
- ▶ VDC, mA output
- ▶ Measuring range 0~3.5MPa
- ▶ 0.15%FS accuracy
- ▶ Gauge and absolute measurement
- ▶ Piezoresistive silicon cell
- ▶ Stainless steel(316L) media-wetted materials

Applications

- ▶ Food Process control
- ▶ Water Resource management
- ▶ Sewage Water & Slurry
- ▶ Glues & Resins
- ▶ Oils & Lubricants
- ▶ Cosmetics & Pulps
- ▶ Abrasive Liquids



Specifications

Range

0 ~ 5kPa ... 3.5MPa(Gauge)
-100kPa ~ 0 ... 3.5MPa (Gauge)
0 ~ 35kPa ... 3.5MPa (Absolute)

Performance

Accuracy	±0.15%FS(RSS)
Thermal Effect on Zero	±0.03%FS/°C
Thermal Effect on Span	±0.03%FS/°C
Compensated Temperature Range	-10 ~ 70°C
Operating Temperature Range	-20 ~ 80°C

Electrical


Excitation	11 ~ 28VDC
Output	0~5VDC, 1~5VDC, 0~10VDC(3, 4Wire) 4~20mA(2, 3 Wire)
Electrical Connection	Connector, Head, Din Connector

Physical

Proof Pressure	X3
Burst Pressure	X4
Vibration	49.1m/s ² {5G}, 10~500Hz
Shock	490m/s ² {50G}
Pressure port	R(PT)3/4", G(PF)3/4"
Media-Wetted Materials	Stainless Steel 316L, Viton
Weight	Connector type : Approx. 180g (Sensor Only)


Dimension

► Connector Type

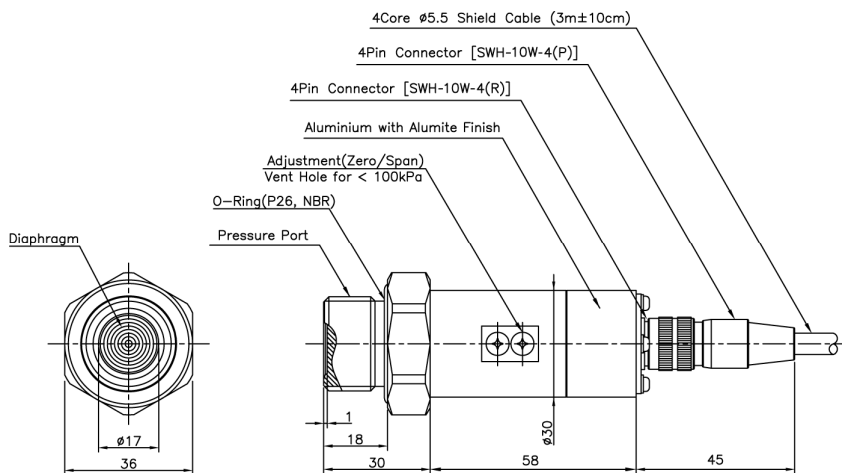


Pin No.	Wire Color	Connections		
		4Wire	3Wire	2Wire
1	Red	Input ⊕	Input ⊕	Input ⊕
2	White	Output ⊖	Common ⊖	×
3	Black	Input ⊖	×	Output ⊕
4	Green	Output ⊕	Output ⊕	×
5	Shield	Earth	Earth	Earth

► Head Type

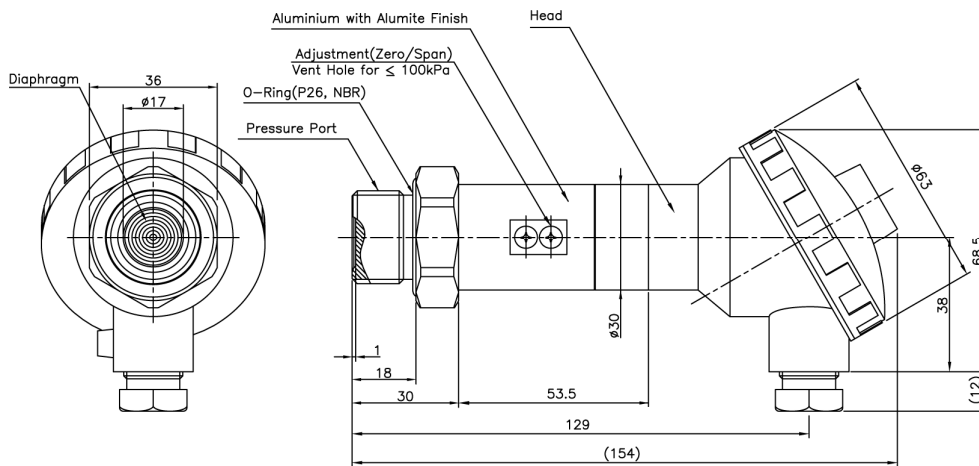

No.	Connections
	2Wire
+	Input ⊕
⊕	Earth
-	Output ⊕


► Din connector Type

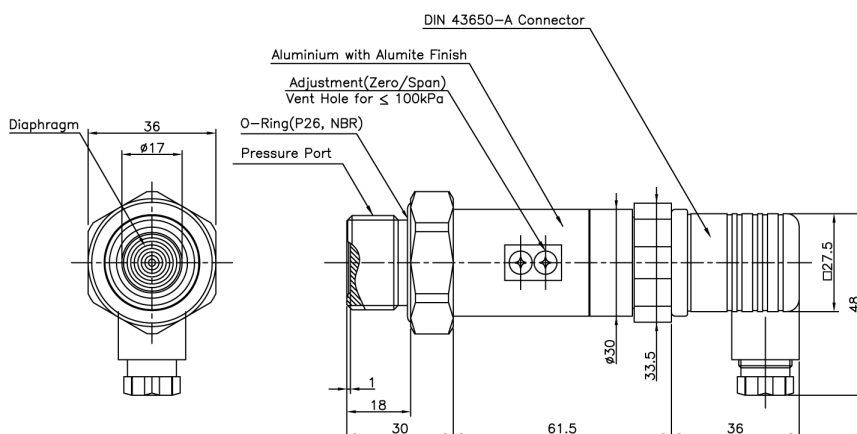


Pin No.	Connections	
	3Wire	2Wire
1	Input ⊕	Input ⊕
2	Common ⊖	Output ⊕
3	Output ⊕	×
⊕	Earth	Earth

Internal Circuit Diagram

► 2Wire mA Output Type

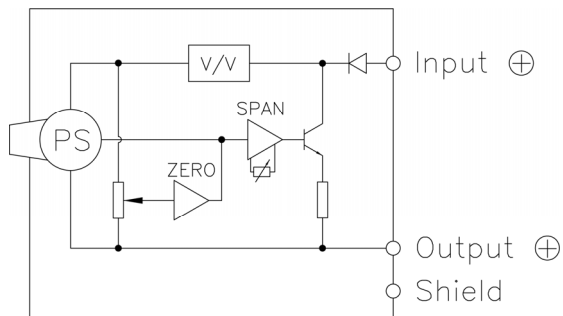

► 3, 4Wire mA, VDC Output Type

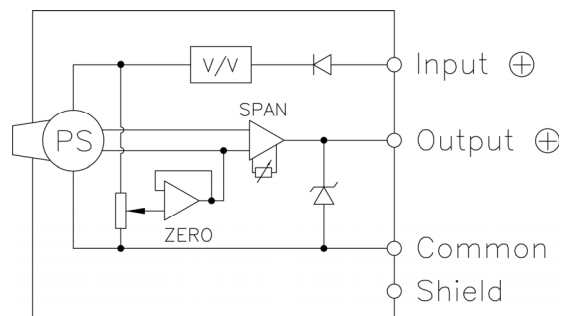

Ordering Information

Model Name	PSH	B	0005	R	I	P	G	Type of Pressure Measurement
								G : Gauge J : Absolute
Output								Connecting Methods
B : 4Wire 0~5V								P : Connector
C : 3Wire 0~5V								H : Head
D : 4Wire 1~5V								I : Din 43650-A connector
E : 3Wire 1~5V								
F : 4Wire 4~20mA								
Pressure Range								Pressure port
XXXX : Pressure								W : R(PT)3/4"(Flush Diaphragm) I : G(PF)3/4"(Flush Diaphragm)
								Pressure Unit
								R : kPa B : bar P : psi C : cmH ₂ O
								M : MPa K : kgf/cm ² H : mmHg



SENSOR SYSTEM TECHNOLOGY CO., LTD.

ADD : Rm.5010, Ansan Digital Park, 81, Neungan-ro,
Danwon-gu, Ansan-si, Gyeonggi-do, Korea.

TEL : 82-31-310-8910~9

FAX : 82-31-310-8920

http://www.sensys.co.kr

e-mail : master@sensys.co.kr

. Specifications are subject to change without notice.